


Fixing guideline: Easy Manifold - All models

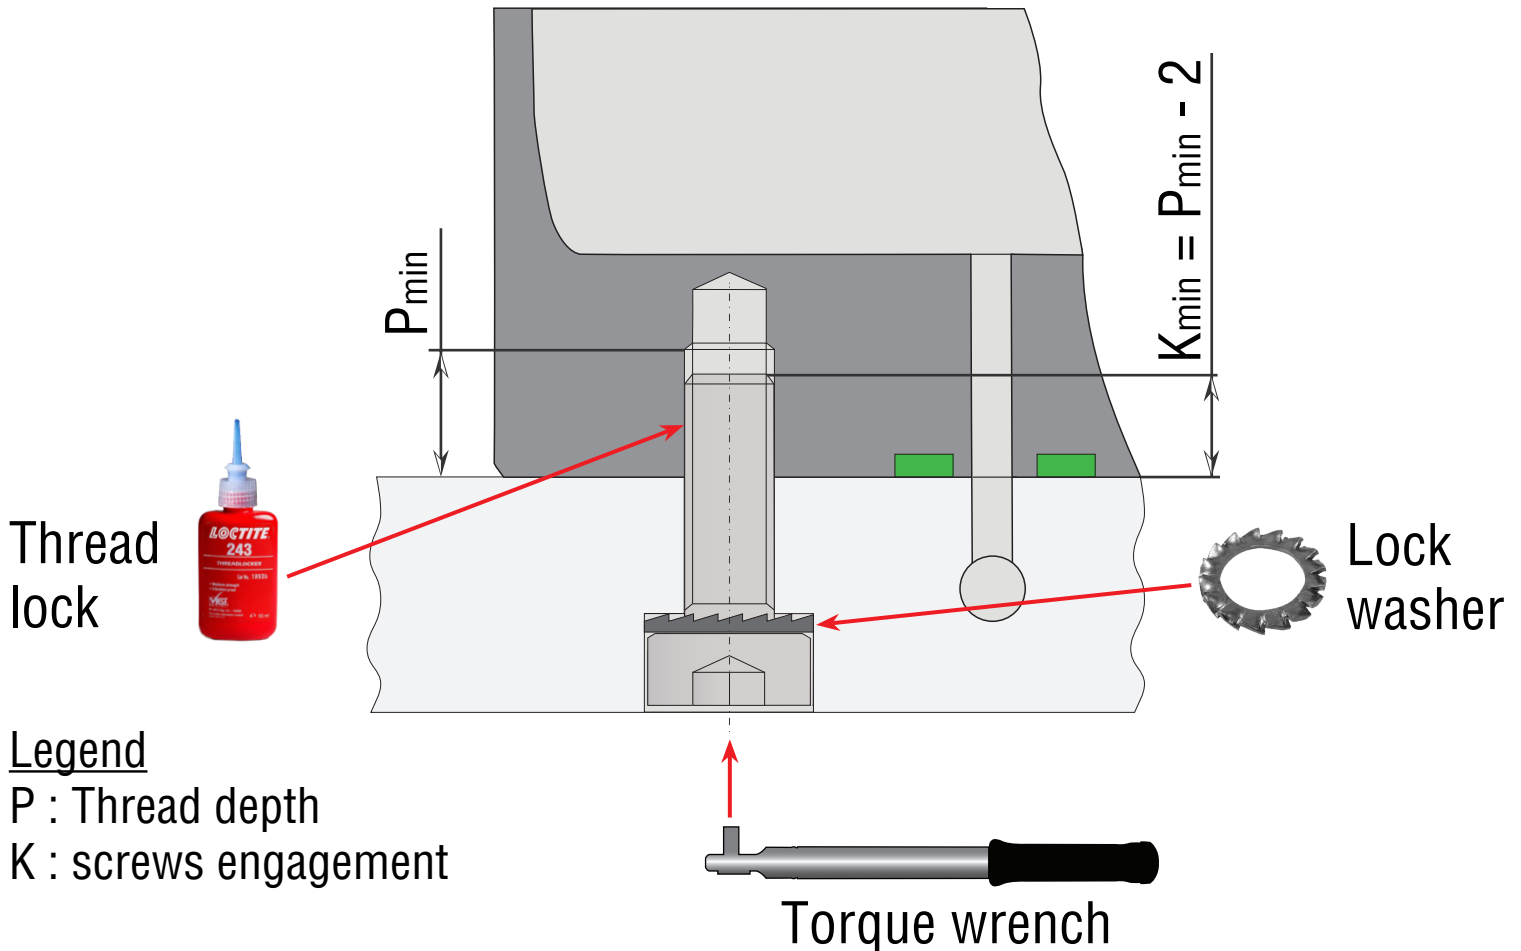

ADVICE

- The use of screws of higher class than 8.8, such as 9.8, 10.9, is always allowed.
- DO NOT EXCEED the fixed values of torque indicated for class 8.8, in any other class of screws used.
- ALWAYS use lock washers DIN 6798A on cylinders and panels.
- ALWAYS use thread lock on cylinders and panels (Loctite 243 type).
- ALWAYS engage thread as much as possible at least Kmin.
- ALWAYS use the fixing holes provided.